

LYNX Pro LE15 Handheld Thermal Monocular Camera



HIKMICRO LYNX Pro LE15 handheld thermal monocular camera is equipped with a 256 × 192 infrared detector and a 720 × 540 LCOS display. It supports functions of observation, distance measurement, Wi-Fi hot spot, and so on. The high-sensitivity built-in thermal detector provides you with clear view even in total darkness. The monocular is mainly applied to scenarios such as hunting, hiking, law enforcement, searching and rescuing, and etc.

- Key Feature
- 256 × 192 resolution, 12 μm, high sensitivity detector
- Adaptive AGC, DDE, 3D DNR, NETD less than 35 mK (@ 25 °C), F# = 1.0
- 720 × 540 resolution 0.2-inch LCOS display
- Built-in rechargeable lithium battery
- Up to 8 hours continuous running
- Hot Spot
- Type-C Interface



•	Sp	ecification	
---	----	-------------	--


Thermal Module				
Image Sensor	VOx Uncooled Focal Plane Arrays			
Max. Resolution	256 × 192			
Pixel Interval	12 μm			
Response Waveband	8 μm to 14 μm			
NETD	Less than 35 mK (@ 25 °C),F# = 1.0			
Lens (Focal Length)	15 mm			
Field of View	11.69° × 8.78° (H × V)°			
Digital Zoom	1 ×, 2 ×, 4 ×, 8 ×			
Aperture	F1.0			
Magnification	1.42 to 11.36			
Image Display				
Display	0.2 inch, LCOS, 720× 540			
FFC (Flat Field Correction) Mode	Auto, Manual, External Correction			
Palettes	Black Hot, White Hot, Red Hot, Fusion			
Frame Frequency	25 Hz			
Smart Function				
Hot Spot	Yes			
Standby Mode	Yes			
Detection Range	708 m			
System				
Built-in Memory	8 GB			
Built-in Memory Capacity	220,000 pictures			
Record Video	Yes			
Capture Snapshot	Yes			
Power Supply				
Battery Type	Lithium battery			
Battery Operating Time	8 hours continuous running with Wi-Fi hot spot function off (@ 25 °C)			
battery operating time	6 hours continuous running with Wi-Fi hot spot function on (@ 25 °C)			
Battery Capacity Display	Yes			
General				
Power	5 VDC/2 A, 1.5 W, Type-C Interface			
Work Temperature	- 20 °C to 55 °C (- 4 °F to 131 °F)			
Protection Level	IP67			
Dimension	158.3 mm × 61 mm × 57 mm (6.23" × 2.40" × 2.24")			
Weight	280 g (0.62 lb)			

Available Model

HM-TS02-15XG/W-LE15



Dimension

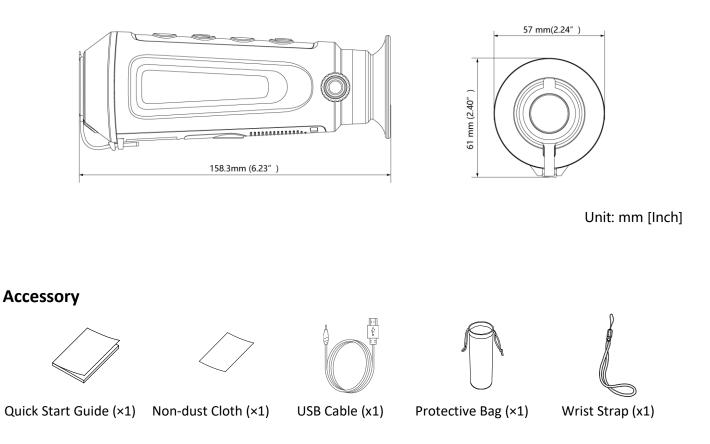

COMPLIANCE NOTICE: The thermal series products might be subject to export controls in various countries or regions, including without limitation, the United States, European Union, United Kingdom and/or other member countries of the Wassenaar Arrangement. Please consult your professional legal or compliance expert or local government authorities for any necessary export license requirements if you intend to transfer, export, re-export the thermal series products between different countries.





Building A1, No. 299, Qiushi Road, Tonglu Economic Development Zone, Tonglu County, Hangzhou, Zhejiang © Hangzhou HikMicro Sensing Technology Co., Ltd. 2021 | Data subject to change without notice!