


CODE: **AWO532W** v.1.2/III
 NAME: **RACK 3U vertical withe housing**

EN

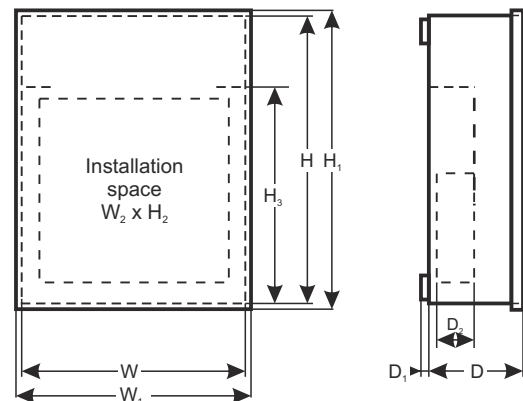

DESTINATION

Vertical surface-mounted RACK 3U enclosure is universal solution for organizing and protecting against unauthorized access or theft of devices in RACK 19" standard with total height of up to 3U. It has special system for hanging devices with possibility of choosing 3 mounting heights and convenient way to remove devices from enclosure. There are also special holders for mounting straps for devices without RACK mounting standard. Inside is double ~ 230 V power socket with power connector equipped with glass fuse.

Enclosures construction is compliant with requirements of General Data Protection Regulation (GDPR), as personal data must be protected and stored securely (possibility of installing two locks with different codes).

TECHNICAL DATA

External dimensions of enclosure:	W=535, H=540, D+D ₁ =163+14 [-/+2mm]
External dimensions of front panel:	W ₁ =541 H ₁ =545 [-/+2mm]
Installation space:	W ₂ =530 H ₂ =380, D ₂ =155 [-/+2mm]
Position of RACK 19" profiles:	H ₃ =380 or 324 or 268 [-/+2mm]
Space for battery:	4x7 Ah; 2x17 Ah
Net/gross weight:	8,16 / 9,14 [kg]
Operating conditions:	Temperature: -10°C + +40°C relative humidity 20%...90%, without condensation
Material:	sheet steel DC01, thickness: 1mm, protection anticorrosion, color: RAL 9003 (white)
Destination:	inside
Tamper switch protection:	1 x microswitch: enclosure opening 0,5 A; 50 V DC max. NC – normally closed contacts Optionally: 1 x microswitch: detachment form wall, 0,5A; 50 V DC (required PKAZ067)
Closing:	screwed: screw x 2
Components:	2x bracket RACK 3U
Notes:	Optional: possibility of installing two locks (MR008 - different code), distance from wall (mounting surface) – 14mm RACK brackets – 3U
Declarations, warranty:	CE, 2 years from production date

Sample assembly:

