



NUCTECH™ CX100100DB

X-RAY INSPECTION SYSTEM



Introduction

NUCTECH™ CX100100DB X-ray Inspection System, NUCTECH's new generation product of dual-view dual-energy X-ray inspection machine for inspection of large luggage, baggage and small cargoes.

CX100100DB employs dual view design, images of each view will be shown on a dedicated monitor, thus dangerous objects and contrabands hidden beneath overlapping area are more likely to be found and located. It stands out with more modern and ergonomic design for efficient and professional X-ray screening. With the tunnel dimensions of 1010mm width and 1005mm height, it is perfectly suitable for baggage inspection in airports, railway stations, customs and ports, etc.

CX100100DB combined with unsurpassed operation ergonomics, reliability and safety can provide excellent image quality and advanced material classification. CX100100DB offers explosive and drug auto detection as optional.

Technical Features

- Based on dual-view advanced technology meeting high level security and operational effectiveness demands
- High image quality with wire resolution of 38 AWG and steel penetration of 35mm
- X-ray leakage around the equipment is close to natural background level, which meets all published international health and safety standards and ensures the radiation safety of operators as well as the public
- Automatic detection and alarm of explosives and drugs
- Support stepwise, continuous zoom and magnifier functions to enlarge images
- Images can be saved as general image format, such as BMP, JPG and PNG, and be transferred to USB storage devices
- Ergonomic keyboard and operator interface design ensure the efficiency and professional of the x-ray screening operation
- Modular design and construction combined with full built-in diagnostic facility guarantee the efficiency of equipment maintenance

Technical Specifications

General Specifications

Tunnel Dimensions	1010mm(W) × 1005mm(H)
Conveyor Speed	0.20m/s
Conveyor Height	700mm
Max. Load	200kg

Image Performance

Wire Resolution	38 AWG
Steel Penetration	35mm
Display Resolution	1280 × 1024

Image Processing System

Image Enhancement	Color/BW, negative, high/low penetration, organic /inorganic stripping, general enhancement, multi-absorptivity, and suspect material enhancement, etc.
Material Classification	According to atomic number signatures
ROI & Zoom	Step/stepless zoom, up to 64 times enlargement
Image Recall	Preceding images recallable
Image Storage Capability	Up to 100,000

Miscellaneous Functions

Standard Functions	Time/date display, counters, user management, system-on/X-ray-on timers, power on self test, built-in diagnostic facilities, dual-direction scanning, system log, system standby and training, etc.
Optional Functions	Explosives/narcotics detections, high-density area alert, threat image projection (TIP)


Health and Safety

X-ray Leakage	Less than 1μSv/h (5cm from the housing), complying with all published international standards
Film Safety	Guaranteed for high speed film up to ASA/ISO1600 (33DIN)

Installation Data

Dimensions	3555mm(L) × 1709mm(W) × 1950mm(H)
Weight	1790kg
Storage Temperature / Humidity	-40°C ~ +60°C / 5% ~ 95% (non-condensing)
Operating Temperature / Humidity	0°C ~ +40°C / 5% ~ 95% (non-condensing)
Power Supply	100VAC ~ 240VAC (-15% ~ +10%), 50 Hz/60Hz ±3Hz
Power Consumption	1.5kVA

Note: Image performance specifications are based on test piece complying with CAAC standard.

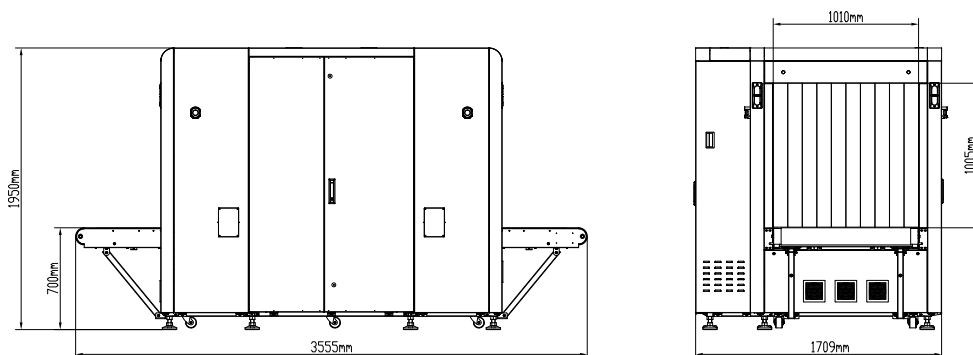

NUCTECH COMPANY LIMITED
 Address: 2/F Block A, Tongfang Building,
 Shuangqinglu, Haidian District,
 Beijing 100084, P.R.China
 Tel: +8610 50980999
 Fax: +8610 62788896

Copyright ©2021 NUCTECH COMPANY LIMITED. All rights reserved.
 Design and specifications are subject to change without notice.
 Printed in CHINA, Apr 2021.

210427



NUCTECH HAS BEEN AWARDED THE CERTIFICATE OF QUALITY MANAGEMENT SYSTEM (ISO 9001:2015)
 NUCTECH HAS BEEN AWARDED THE CERTIFICATE OF ENVIRONMENTAL MANAGEMENT SYSTEM (ISO 14001:2015)
 NUCTECH HAS BEEN AWARDED THE CERTIFICATE OF OCCUPATIONAL HEALTH AND SAFETY MANAGEMENT SYSTEM (OHSAS 18001:2007)

