

## DS-2CS58C0T-ITR

720P IR Mobile Domes camera



### Key Features:

- 1.0MP Progressive Scan CMOS
- Turbo HD output, up to 720P resolution
- 0.1Lux @(F1.2,AGC ON),0 Lux with IR
- Adopt wide-angle lens with wider monitoring coverage
- Support electronic shutter, AGC and auto Day & Night switch
- Up to IP68 protection level
- Anti-vibration design and aviation port for mobile environments


### Application:

Suitable for reversing monitoring.

### Order Model:

DS-2CS58C0T-ITR

### Dimensions:

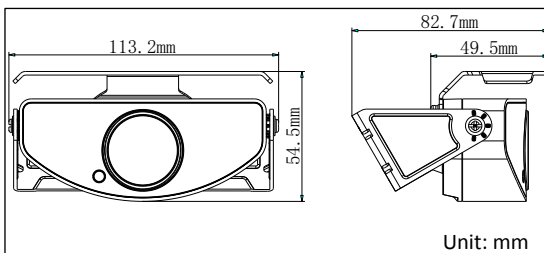

### Specification:

Model	
Parameter	720P IR Mobile Dome Camera
<b>Camera</b>	
Image Sensor	1.0Mega Progressive Scan CMOS
Signal System	1280(H)×800(V)
Min. Illumination	0.1Lux @ (F1.2,AGC ON),0 Lux with IR
Shutter Time	1/25(30)s to 1/50,000s
Lens	2.1mm (2.8mm/3.6mm optional)
Lens Mount	M12
Angle Adjustment	Tilt: 90°
Day & Night	Electronic
Horizontal Definition	950TVL
Synchronization	Internal
Video Output	Aviation port
HD Video Output	1 Turbo HD output, in line with HDTVI standard
Function	Mirror(PTZ control)
<b>General</b>	
Working Temperature/Humidity	-40℃~80℃, Humidity 90% or less (non-condensing)
Power Supply	DC6V-16V
Power Consumption	3.5W MAX
IR Range	20-30m
Protection Level	IP68
Dimension(mm)	89.6×59.1
Weight	400g