

DS-7600NI-K1/A (B) SERIES NVR



Features and Functions

HD Input

- H.265+/H.265/H.264/H.264+ video formats
- Connectable to the third-party network cameras
- Up to 16 IP cameras can be connected
- Recording at up to 8 MP resolution
- Live view, storage, and playback of the connected camera at up to 8 MP resolution

HD Output

- HDMI/VGA simultaneous output (DS-7604NI- K1 (B))
- HDMI and VGA independent outputs (DS-7608NI-K1 (B) and DS-7616NI- K1 (B))
- HDMI Video output at up to 4K (3840 × 2160) resolution

HD Storage

- 1 SATA interface connectable for recording and backup
- H.265+ compression effectively reduces the storage space and costs by up to 75%

HD Transmission

- 1 self-adaptive 10/100/1000 Mbps network interface

Various Applications


- Centralized management of IP cameras, including configuration, information import/export, real-time information display, two-way audio, upgrade, etc.
- Connectable to smart IP cameras from Hikvision and the recording, playing back, and backing up of VCA alarms can be realized
- VCA detection alarm is supported
- Instant playback for assigned channel during multi-channel display mode
- Smart search for the selected area in the video; and smart playback to improve the playback efficiency
- Hik-Connect for easy network management



Specifications

Model		DS-7604NI-K1/A (B)	DS-7608NI-K1/A (B)	DS-7616NI-K1/A (B)
Video/Audio input	IP video input	4-ch	8-ch	16-ch
		Up to 8 MP resolution		
	Two-way audio	1-ch, RCA (2.0 Vp-p, 1 k Ω)		
Network	Incoming bandwidth	40 Mbps	80 Mbps	160 Mbps
	Outgoing bandwidth	80 Mbps		
Video/Audio output	Recording resolution	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
	HDMI output resolution	1-ch, 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz; HDMI/VGA simultaneous output	1-ch, 4K (3840 × 2160)/30Hz, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	VGA output resolution	1-ch, 1920 × 1080p/60Hz, 1600 × 1200/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz; HDMI/VGA simultaneous output	1-ch, 1920 × 1080p/60Hz, 1280 × 1024/60Hz, 1280 × 720/60Hz, 1024 × 768/60Hz	
	Audio output	1-ch, RCA (Linear, 1 kΩ)		
Decoding	Decoding format	H.265/H.265+/H.264/H.264+/MPEG4		
	Live view / Playback resolution	8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA /720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF		
	Synchronous playback	4-ch	8-ch	16-ch
	Capability	1-ch @ 8 MP / 4-ch @ 1080p		
Network management	Network protocols	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, NFS, iSCSI, UPnP™, HTTPS		
Hard disk	SATA	1 SATA interface		
	Capacity	Up to 6TB capacity for each disk		
External interface	Network interface	1, RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface		
	USB interface	2 × USB 2.0		
	Alarm in/out			
General	Power supply	12 VDC		
	Power	≤ 18W		
	Consumption (without hard disk)	≤ 10 W		
	Working temperature	-10 to +55° C (+14 to +131° F)		
	Working humidity	10 to 90 %		
	Chassis	1U chassis		
	Dimensions (W × D × H)	315 × 240 × 48 mm (12.4" × 9.4" × 1.9")		
Weight(without hard disk)	≤ 1 kg (2.2 lb)			

Physical Interfaces

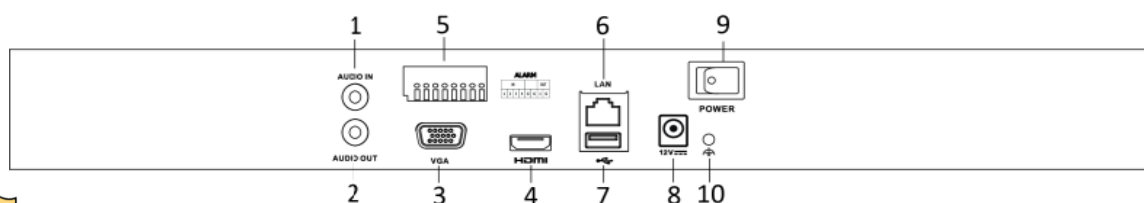

NOTE

The rear panel of DS-7208/7216NI-K1/A (B) provides 8/16 alarm input and 4 output interfaces.

Index	Description	Index	Description
1	Power Supply	6	VGA Interface
2	Audio In	7	USB Interface
3	HDMI Interface	8	Ground
4	LAN Network Interface	9	Power Switch
5	Audio Out		

Available Models

DS-7604NI-K1/A (B), DS-7608NI-K1/A (B), DS-7616NI-K1/A (B)

Distributed by



RIEL Elektronikai Kft.

1139 Budapest, Rőppentyű u. 24.
 Tel.: +36 1 236 8090
 E-mail: info@riel.hu
www.riel.hu

HIKVISION®

Headquarters

No.555 Qianmo Road, Binjiang District,
 Hangzhou 310051, China
 T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
 T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
 T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
 T +65-6684-4718
sg@hikvision.com

Hikvision Africa
 T +27 (10) 0351172
sale.africa@hikvision.com

Hikvision Europe
 T +31-23-55-42-770
info.eu@hikvision.com

Hikvision France
 T +33(0)1-85-330-450
info.fr@hikvision.com

Hikvision Oceania
 T +61-2-8599-4233
salesau@hikvision.com

Hikvision Hong Kong
 T +852-2151-1761

Hikvision Middle East
 T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
 T +34-91-737-16-55
info.es@hikvision.com

Hikvision Canada
 T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Russia
 T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
 T +48-22-460-01-50
poland@hikvision.com

Hikvision Korea
 T +82-31-731-8841
sales.korea@hikvision.com

Hikvision India
 T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
 T +01628-902140
support.uk@hikvision.com

Hikvision Brazil
 T +55 11 3318-0050
Latam.support@hikvision.com