

## DS-KD9203-MFE6

Metal Facial Recognition Door station with 4.3-inch Screen



The KD9 series IP door station helps to view the details of entrance or door with high resolution image and large view by two 2 MP camera, which provides a safety environment. It supports multiple authentication modes, such as face, fingerprint, card, and buttons, satisfying different environments and providing convenient use experience, which helps visitors or residents to use video intercom in the scenarios of apartment, office, construction site, etc.

- 4.3-inch colorful LCD screen with 800 × 480 resolution
- 2 × 2 MP wide-angle HD lens
- IP65 protection level
- Built-in M1 card reading module
- Multiple interfaces: RJ45, RS-485, alarm input, relay
- Convenient configuration via Web remotely
- Convenient unlock methods: face, cards, PIN code and fingerprints

## ▪ Specification

System parameters	
Operation system	Linux
ROM	1 GB
RAM	4 GB
Processor	Embedded high performance processor
Display parameters	
Screen size	4.3-inch
Operation method	/
Type	Colorful LCD
Resolution	800 × 480
Video parameters	
Lens	2 × 2 MP HD camera
Resolution	Main stream: 1080p@30fps, 720p@30fps Sub stream: VGA@25fps, VGA@30fps
FOV	/
Wide dynamic range (WDR)	Digital WDR/120 dB
Supplement light	IR light, up to 3 m
Video compression standard	H.264
Audio parameters	
Audio input	1 built-in omnidirectional microphone
Audio compression standard	G.711 U, G.711 A
Audio output	1 built-in loudspeaker
Audio compression bitrate	64 Kbps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
User capacity	10,000
Face capacity	5000
Card capacity	50,000
Fingerprint capacity	5000
Network parameters	
Network protocol	TCP/IP, RTSP
Wi-Fi	/
Bluetooth	/
3G/4G	/
Device interfaces	
Alarm input	4
Network interface	1 RJ-45 10/100/1000 Mbps self-adaptive
TAMPER	1
Exit button	1
RS-485	2 RS-485 (Half duplex, HIKVISION)
USB	/
Wiegand	/
TF card	/



No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T: +86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq

Alarm output	/
Lock control	1 relays, Max. 30 VDC, 2 A
Door contact input	1
<b>General</b>	
Button	Physical buttons
Installation	Flush mounting
Indicator	/
Weight	Net weight: 1.23 kg Gross weight: 1.515 kg
Protective level	IP65
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	10% to 90% (no-condensing)
Dimension (W × H × D)	373 mm × 124 mm × 43.7 mm (14.69" × 4.88" × 1.72")
Power supply	12 VDC, 1.5 A
Application environment	Outdoor
Power consumption	≤ 13 W
Language	English, French, German, Spanish, Italian, Portuguese, Dutch, Czech, Danish, Hungarian, polish, Romanian, Slovak, Indonesian, Burmese, Turkish, Russian, Ukrainian, Arabic

## ▪ Available Model

DS-KD9203-MFE6

### Headquarters


No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.



▪ **Dimension**

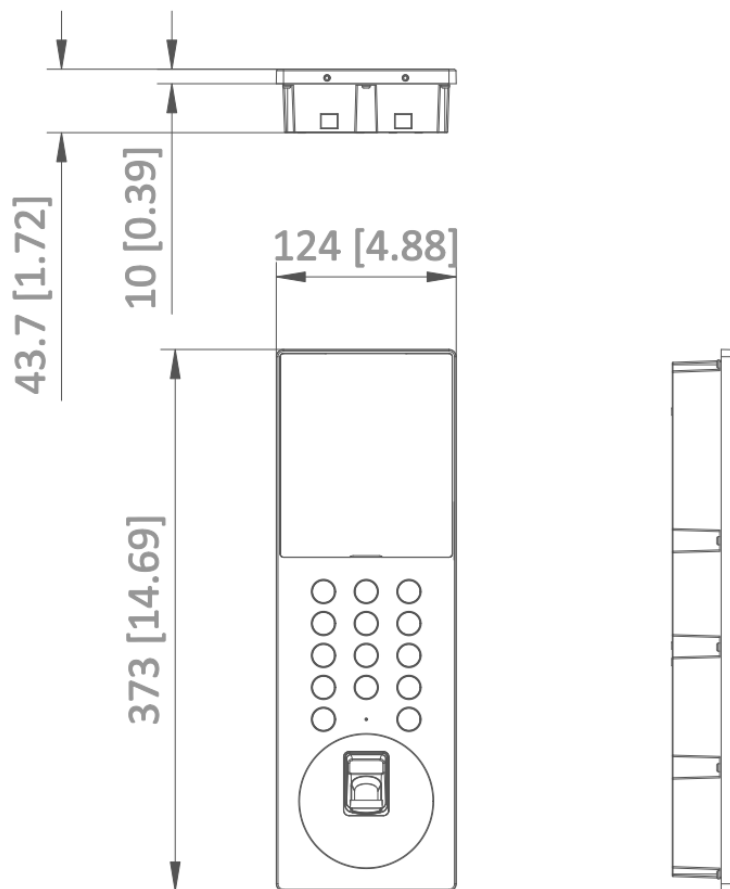

**Unit: mm [inch]**

<b>SCALE</b>	<b>1:1</b>
--------------	------------

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.

