

**DS-KIS212(B)**  
**4-Wire HD Video Intercom Kit**



- HD TVI video quality
- Plug & play
- One-press to call
- One-press to unlock the door
- Max 2 door stations and 3 indoor stations in one system

## ▪ Specification


<b>Door station</b>	
Supplement light	IR light, up to 3 m
Resolution	Stream resolution: 1280 * 720@60fps
FOV	Horizontal: 130° , Vertical: 70°
<b>Door station</b>	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
<b>Door station</b>	
Lock control	1 relay, max 30V 1 A
Debugging port	1
Four-wire	1 four-wire interface
<b>Door station</b>	
Button	1 physical button(s)
Indicator	/
Power supply	12 VDC
Power consumption	Max. 4W
Working temperature	-30° C to + 60° C
Working humidity	10% to 90%
Dimensions	136mm x 51mm x 20mm
Application environment	Indoor
Installation	Surface mounting
Protective level	/
Material	Plastic
<b>Indoor station</b>	
Operation method	Physical button
Type	7-inch colorful TFT
Resolution	1024 x 600
<b>Indoor station</b>	
Audio input	Built-in omnidirectional microphone
Audio output	Built-in loudspeaker
<b>Indoor station</b>	
Linked indoor extensions capacity	2
Linked doorphone capacity	2
Linked analog camera	1
<b>Indoor station</b>	
Power supply input	12V DC
Debugging port	1
Four-Wire interface	4, 2 for indoor extensions, 2 for doorphones
DIP switch	1 Bit
BNC	1
<b>Indoor station</b>	
Button	4 physical button
Power supply	12 VDC

Power consumption	≤5 W
Working temperature	-10° C to + 55° C (14° F to 131° F)
Working humidity	10% to 90%
Dimensions (W × H × D)	178mm x 132mm x 19mm
Installation	Surface mounting
Application environment	Indoor
Protective level	/

▪ **Available Model**


DS-KIS212(B)

▪ **Dimension**

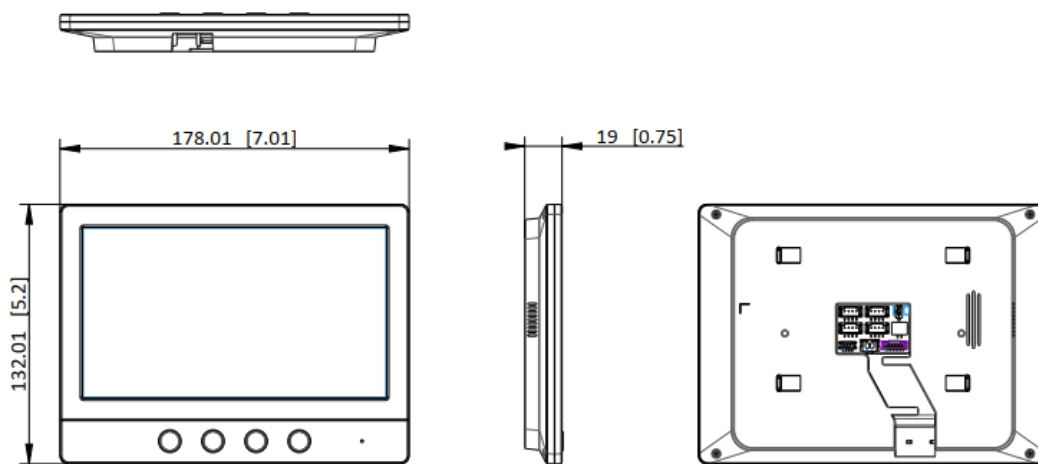

Unit:mm [inch]

SCALE	1:1
-------	-----

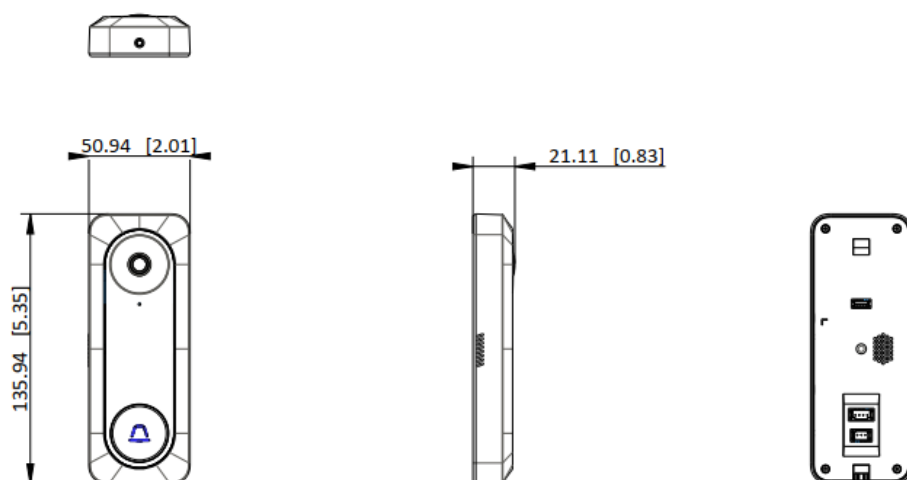

Unit:mm [inch]

SCALE	1:1
-------	-----

- Accessory
- Optional

DS-KABV24-A



# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)

