

DS-MH6171I 1080P Portable PTZ



Embedded with video & audio CODEC, 3G/4G, WIFI, GPS module, Hikvision DS-MH6171I portable PTZ is widely used in temporary events surveillance, for example, in parade, strike, outdoor concert, law enforcement, onboard monitoring, fire protection, etc. Due to the magnetic base & tripod bracket design, replaceable battery, built-in SD card, mobile APP control via easy WIFI AP connection, the DS-MH6171I has the features of easy to carry, easy to deploy and easy to operate.

- **Video**
 - 1/2.8" progressive scan CMOS; 1920 x 1080/ 1280 x 720 resolution
 - Support H.264/ H.265 Video compression
 - 30X optical zoom, 12X digital Zoom
 - 3D DNR, WDR, 3D positioning, Auto IR cut switch, Auto focus , BLC, WB, defog
 - Support IR, up to 80m
- **Storage**
 - Double Built-in SD/SDXC card slot, up to 128GB
- **Communication Module**
 - Support 3G (WCDMA) (Baseline model); Support 4G (Customization needed)
 - Support double 3G or 4G modular (Customization needed)
 - 802.11a/b/g/n WIFI, GPS positioning module, Bluetooth 4.0
- **Usability**
 - Magnetic base design and tripod bracket make the installation very easy
 - WI-FI AP function allow phone connection to dome directly, so to control the dome very conveniently
 - Pluggable battery for 6 hours continuously working
 - Replaceable battery design to prolong the working time
 - True 360° unlimited pan
- **Intelligent function**
 - Auto tracking
 - LPR function (Customization needed)




Specifications

Camera	
Image Sensor	1/2.8" Progressive Scan CMOS
Min. Illumination	Color: 0.05 Lux @ (F1.6, AGC ON), B/W: 0.01Lux @ (F1.6, AGC ON), 0 Lux with IR
Day & Night	IR Cut Filter
Focus Mode	Auto/ Semiautomatic/ Manual
Shutter Speed	1/1 ~ 1/30,000s
S/N Ratio	> 52dB
Signal System	PAL/NTSC
Digital Zoom	12X
Optical Zoom	30X
Image	
Resolution	50Hz: 25fps (1920 × 1080), 60Hz: 30fps (1920 × 1080), 50Hz: 25fps(1280x720), 60Hz: 30fps(1280x720)
Digital WDR	Support
3D DNR	Support
White Balance	Auto1/ Auto2/ Indoor/ Outdoor/ Manual/ Daylight lamp/ Sodium lamp
Infrared	
IR Distance	Up to 60m
IR Intensity	Automatically adjusted, depending on the zoom ratio
System Integration	
External Interfaces	Alarm I/O, Serial Port, Network Interface
Onboard Storage	Double Built-in SD/SDXC card slot, up to 128GB
Network	Support 3G (WCDMA) (Baseline model); Support 4G (Customization needed) Support double 3G or 4G modular (Customization needed)
GPS System	Support GPS
Bluetooth	BT4.0
WI-FI	802.11a/b/g/n
General	
Power	8VDC to 36VDC
Power Consumption	Approx. 15W
Working Temperature/ Humidity	From -20 °C to 60 °C (From -4 °F to 140 °F), Humidity 90% or less
Protection Level	IP66 standard, TVS 4,000V lightning protection, surge protection and voltage transient protection
Weight	Approx. 2.8kg (6.17lb) with battery

Available Model

3G Portable PTZ: DS-MH6171I

Dimensions

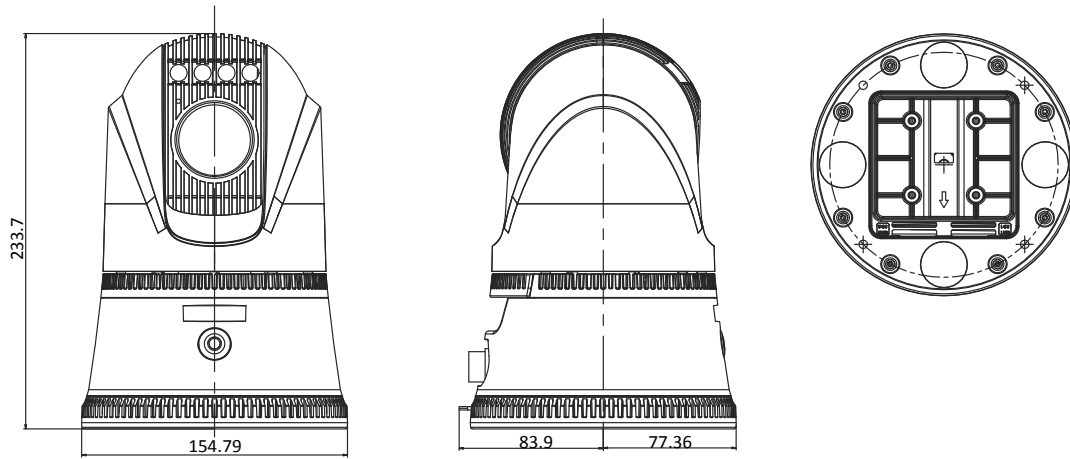


Accessories (Order Separately)



Tripod DS-MH1691-H



Battery Charger DS-MH1490



Lithium battery

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Hong Kong
T +852-2151-1761

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision Canada
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com