

## DS-MP7608HN Series Mobile NVR



### Main Features

- Connects 8-ch IP cameras via PoE interfaces. Connects 8 more IP cameras via PoE switch.
- Up to 1080p resolution of H.264/H.265 compression for each IP camera.
- One CVBS video output interface.
- One VGA video output interface with up to 1080p resolution.
- Two pluggable 2.5-inch HDDs/SSDs, adopting hard disk vibration damping technology.
- Store videos that has dropped frame in SD card when HDDs/SSDs are damaged).
- Pluggable 3G/4G module and Wi-Fi module providing flexible data transmission solutions.
- Built-in GPS (Global Positioning System) module precisely positioning the vehicle via the satellite and recording the location information in the video stream.
- Information collection interfaces collecting driving information such as left/right turning, braking, backing up, etc.
- Specialized aviation connectors ensuring signal stability.
- Shutdown delay (0 h to 6 h) and 24-hour scheduled startup/shutdown.
- Back up two upgrade packages to reduce risk of failure.
- Battery protection avoids vehicle from running out of battery.
- Wide-range power input (+9 VDC to +32 VDC).
- Power-off protection prevents key data from loss.
- Supports accessing via WEB browser.
- Aluminum die-cast chassis.
- Mobile DVR housing is available for protecting mobile DVR from water.

### Available Models

DS-MP7608HN,

DS-MP7608HN/GW, (Supports 3G dialing)

DS-MP7608HN/GW/WI, (Supports 3G dialing and Wi-Fi)

DS-MP7608HN/GW/WI58, (Supports 3G dialing and 5.8 G Wi-Fi)




# Specifications

Model		DS-MP7608HN
Video/Audio input	IP camera	16-ch: 8-ch connected via PoE interfaces and 8-ch extendable via PoE interfaces
	Protocol	HIKVISION
	Two-way audio input	1-ch (2.0Vp-p, 1K $\Omega$ ), G.722
Video/Audio output	CVBS video output	1-ch, PAL: 704 × 576, NTSC: 704 × 480
	VGA video output	1-ch, resolution: 1920 × 1080, 1280 × 1024, 1280 × 720, 1024 × 768
	Audio output	1-ch
Encoding/Decoding parameters	Video compression	H.264, H.265
	Encoding resolution	Main stream: 1080p/720p/WD1/4CIF. Sub-stream: 4CIF/2CIF/CIF
	Frame rate	PAL: 1 to 25fps; NTSC: 1 to 30fps
	Stream type	Video, Video & Audio
	Audio bitrate	16 Kbps
	Dual stream	Supported
Storage media	HDD/SSD	2 × 2.5 inch HDD/SSD. Up to 2 TB for each HDD/SSD Dummy HDD with USB 3.0 interface
	SD card	1 × SD card
Wireless network	3G/4G dialing	1 × 3G/4G antenna, 1 × SIM card slot
	Wi-Fi	2 × Wi-Fi antenna, SMA interface, 5.8 G and 2.4 G are available
Positioning	GNSS	1 × positioning antenna for GPS
External interface	PoE interface	8 × RJ45 PoE interface
	Network interface	2 × 10M/100M/1000M RJ45 Ethernet interface
	Serial port	2 × RS-232. 1 × RS-485. 1 × RS-422 (integrated in EXT.DEV interface)
	CAN interface	2
	USB interface	<ul style="list-style-type: none"> <li>● Front panel: 1 × USB 3.0</li> <li>● Rear panel: 1 × USB 2.0 of 5-pin aviation plug</li> </ul>
	Sensor in	4 high/low level signal inputs. 1 pulse signal input. 1 BUTTON input (reserved)
	Alarm input	4 high/low level signal inputs
	Alarm output	2 relay signal outputs
General	Operating method	Mouse, IR remote control, Web control, and touchscreen
	Power supply	9 to 32 VDC
	Consumption	<ul style="list-style-type: none"> <li>● Standby: &lt; 0.1 W</li> <li>● Full load: &lt; 20 W (without display, camera, and HDD/SSD)</li> </ul>
	Working temperature	<ul style="list-style-type: none"> <li>● Device of which the dummy HDD provides heating function: -10 °C to +55 °C (14 °F to 131 °F)</li> <li>● Other devices: -20 °C to +60 °C (-4 °F to +140 °F)</li> </ul>
	Working humidity	10% to 95%
	Dimensions (W × D × H)	202 × 267.6 × 93.9 mm (8.0 × 14.5 × 3.7 inch)
	Weight (without HDDs/SSDs)	3.66 kg (8.07 lb)


# Physical Interfaces

## Front Panel

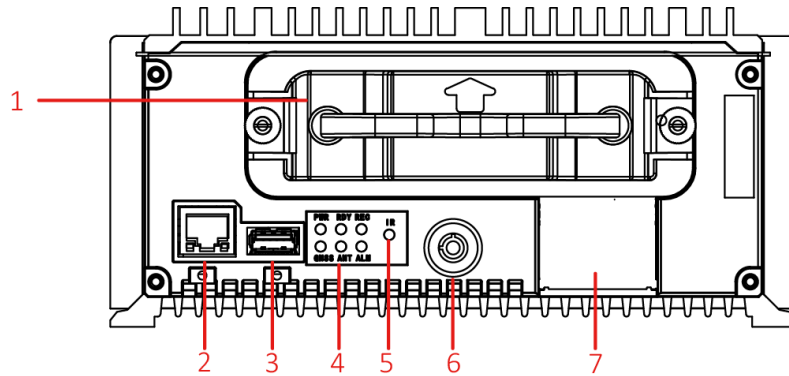


No.	Name	No.	Name
1	Dummy HDD/SSD	4	Power indicator
2	10M/100M/1000M RJ45 Ethernet interface		Ready indicator
3	USB 3.0 interface		Record indicator
5	IR receiver		GNSS indicator
6	Lock/Unlock the hard disk box.		ANT indicator
7	SD card slot		Alarm indicator

## Rear Panel

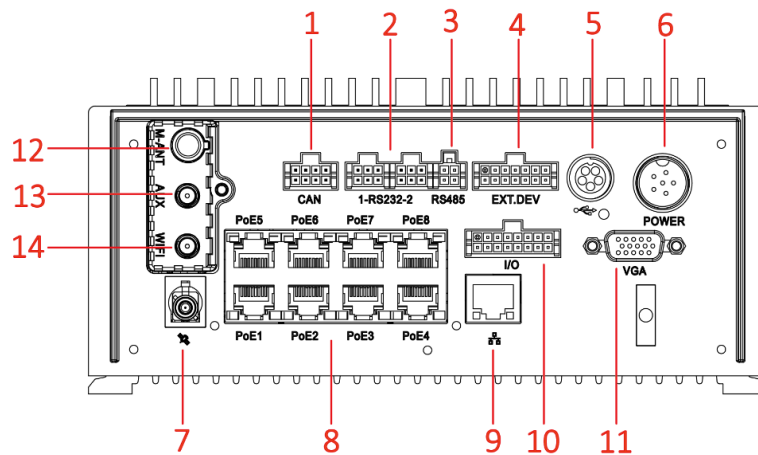

No.	Name	No.	Name
1	2 × CAN interface	8	8 × PoE interface
2	2 × RS-232 interface	9	1 × 10M/100M/1000M RJ45 Ethernet interface
3	RS-485 interface	10	I/O interface: 4-ch alarm inputs, 4-ch sensor in; 1-ch pulse signal input
4	EXT.DEV interface: RS-422 communication interface, two-way audio interface, and CVBS video output	11	VGA video output interface
5	USB interface of 5-pin aviation plug	12	Main 3G/4G antenna interface
6	6-pin aviation plug for power supply	13	Aux Wi-Fi antenna interface
7	GNSS antenna interface	14	Main Wi-Fi antenna interface

# Peripheral Connection

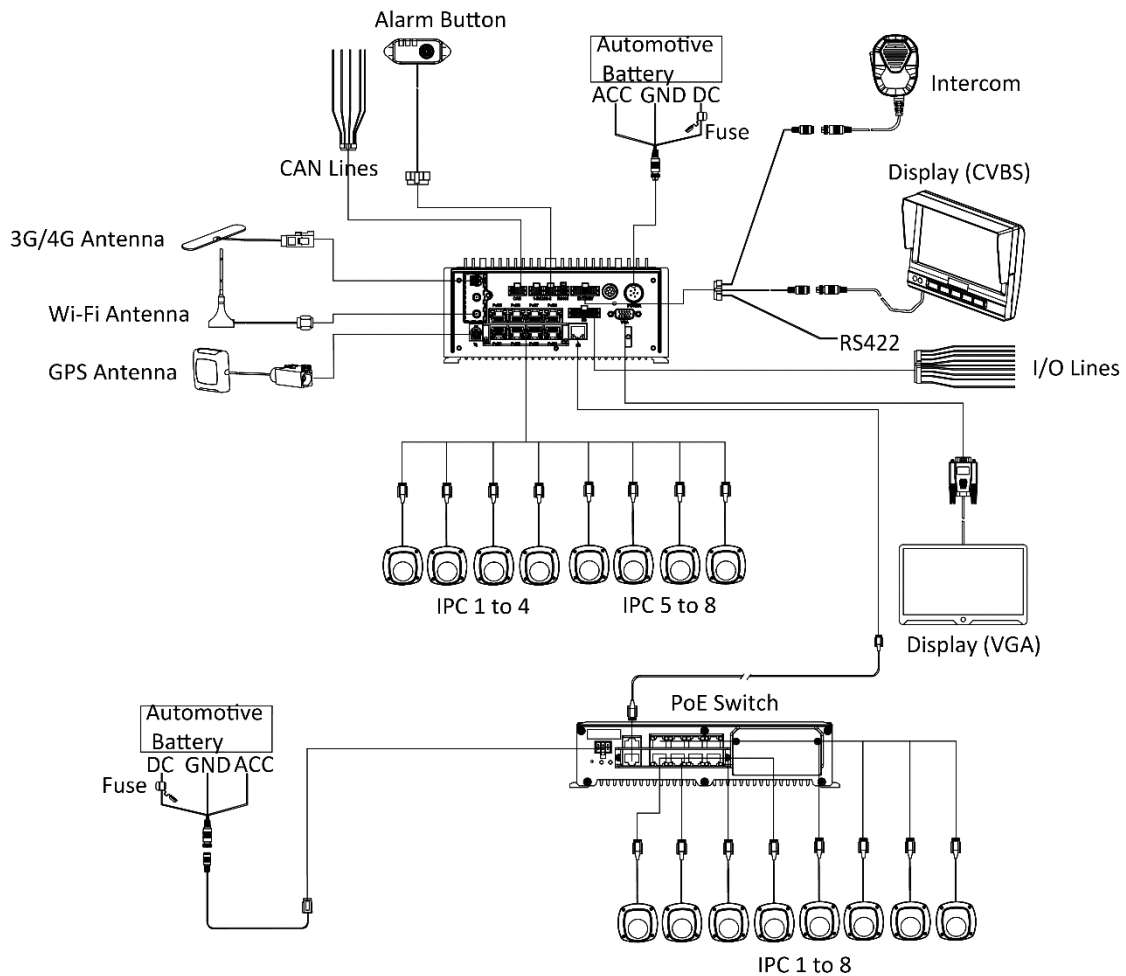

Distributed by



## HIKVISION

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761