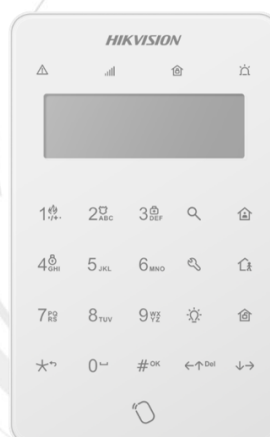


DS-PK501LTM-HWE

- LCD screen display
- Supports one-touch arm (Arming without password)
- Supports Fire/Panic/Medical alarm key
- Supports 2 on-board alarm inputs and 1 on-board relay output
- Supports maximum 64 keyfobs and emergency button
- Supports sliding back cover opening to simplify installation.

▪ Specification

Hardware features	
Tag reader built-in	1
Tamper-Proof	Wall tamper Cover tamper
Buzzer	1
Alarm input	2
IO output	1
Electrical characteristics	
Storage temperature	-20°C to 60°C (-4°F to 140°F)
Power supply	9-16 V
Operation humidity	10% ~ 90% noncondensing
Operation temperature	-10°C to 40°C (14°F to 104°F)
Power consumption	Quiescent Current 40 mA @12VDC
	Maximum Current 200 mA @12VDC
Wireless transmission	
RF frequency	868.0-868.6 MHz
Display	
Display screen	Mono LCD
LED indicator	Signal : Green/Red indicate Bus status Fault : Amber indicate system on abnormal Alarm : Red indicate system on alert arm/disarm : Blue/Green indicate system on arm/disarm
General	
Dimension (W×H×D)	175 × 110 × 27 mm
Weight	301g
Device management	
Wireless emergency button	64
Keyfob	64

▪ Available Model

DS-PK501LTM-HWE

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq