



Cable ID: NCN-P1C6U-10CBK

Date / Time: 10/21/2024 02:06:53 PM

Headroom 10.3 dB (NEXT 45-78)

Test Limit: TIA Cat 6 Channel

Cable Type: Cat 6 U/UTP

NVP: 71.0%

Operator: WLQ

Software Version: V6.6 Build 2

Limits Version: V7.6

Calibration Date:

Main (Module): 06/30/2020

Remote (Module): 06/30/2020

Test Summary: PASS

Model: DSX-8000



Main S/N: 1903179

Remote S/N: 1852211

Main Adapter: DSX-CHA804

Remote Adapter: DSX-CHA804

Length (m), Limit 100.0	[Pair 12]	10.4
Prop. Delay (ns), Limit 555	[Pair 36]	51
Delay Skew (ns), Limit 50	[Pair 36]	2
Resistance (ohms)	[Pair 12]	2.82
Insertion Loss Margin (dB)	[Pair 36]	31.4
Frequency (MHz)	[Pair 36]	250.0
Limit (dB)	[Pair 36]	35.9

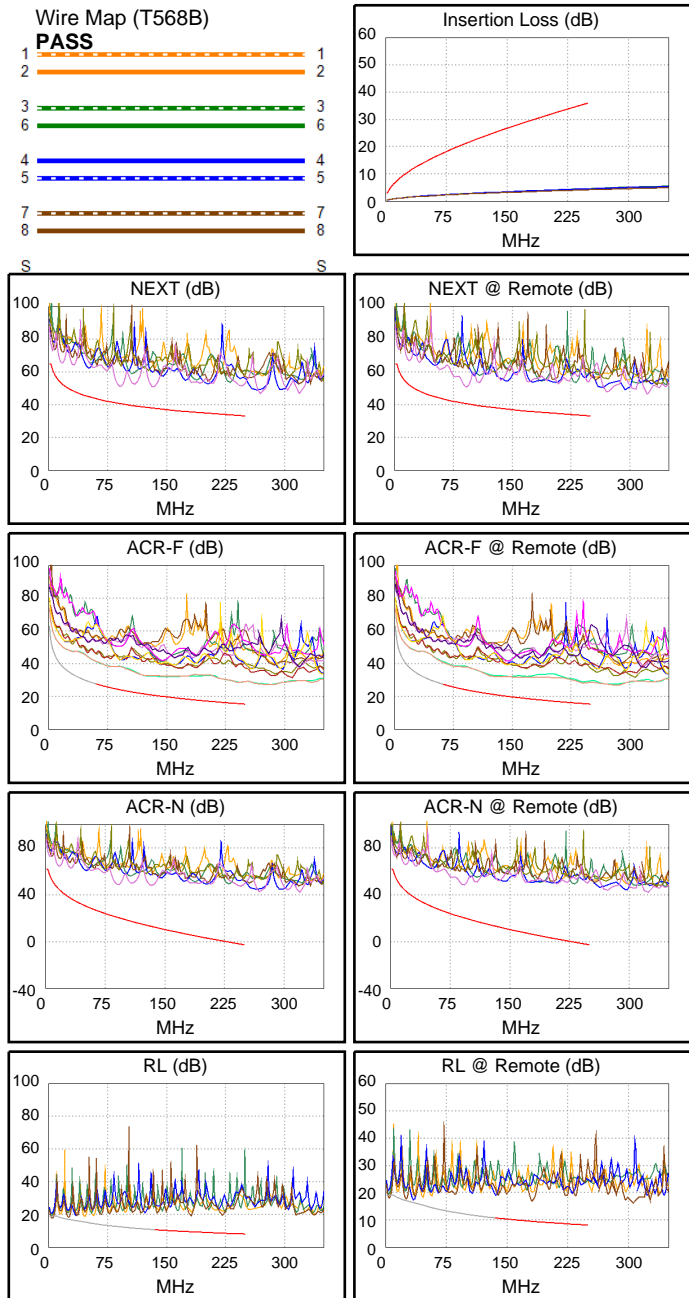

Worst Case Margin Worst Case Value

PASS	MAIN	SR	MAIN	SR
Worst Pair	45-78	45-78	45-78	45-78
NEXT (dB)	10.6	10.3	13.0	10.4
Freq. (MHz)	91.8	91.8	133.0	92.3
Limit (dB)	40.6	40.6	37.8	40.5
Worst Pair	78	78	78	78
PS NEXT (dB)	12.5	12.9	19.4	18.8
Freq. (MHz)	3.3	92.3	245.5	209.0
Limit (dB)	62.0	37.7	30.3	31.5

PASS	MAIN	SR	MAIN	SR
Worst Pair	78-45	78-45	45-78	78-45
ACR-F (dB)	11.0	10.8	12.9	12.5
Freq. (MHz)	1.9	123.0	241.5	241.5
Limit (dB)	57.8	21.5	15.6	15.6
Worst Pair	45	78	45	45
PS ACR-F (dB)	12.6	12.6	15.6	15.2
Freq. (MHz)	1.0	1.0	242.0	241.5
Limit (dB)	60.3	60.3	12.6	12.6

N/A	MAIN	SR	MAIN	SR
Worst Pair	45-78	45-78	45-78	45-78
ACR-N (dB)	14.2	15.2	49.7	28.3
Freq. (MHz)	3.3	3.0	245.5	92.3
Limit (dB)	60.9	61.5	-2.3	20.2
Worst Pair	78	78	78	78
PS ACR-N (dB)	15.7	17.0	51.0	47.4
Freq. (MHz)	3.3	3.5	245.5	209.0
Limit (dB)	58.4	57.7	-5.3	-0.8

PASS	MAIN	SR	MAIN	SR
Worst Pair	78	78	78	78
RL (dB)	9.7	7.4	9.7	7.4
Freq. (MHz)	181.0	182.0	181.0	182.0
Limit (dB)	9.4	9.4	9.4	9.4

Compliant Network Standards:
 10BASE-T 100BASE-TX 100BASE-T4
 1000BASE-T 2.5GBASE-T 5GBASE-T
 ATM-25 ATM-51 ATM-155
 100VG-AnyLan TR-4 TR-16 Active
 TR-16 Passive