

New generation recessed wall photocells



Protection:

Electronics protected by a preassembled gasket on a dedicated housing.

Simplicity and ease of installation:

Cable passage arranged both at the bottom and at the rear of the photocell. Large space dedicated to wiring.

Design:


New attractive design with no visible screws

Adjustment:

The slotted holes allow adjustment of the position even after installation

Duration:

High quality plastic material with anti-UV additives and embossed painting

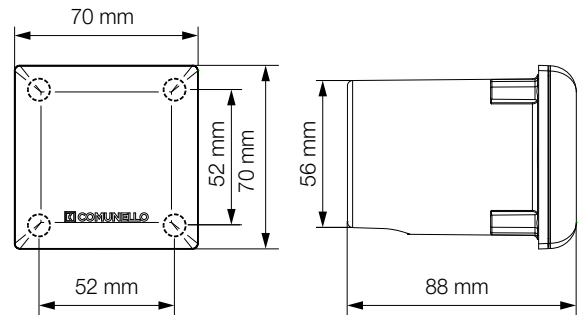


Icon	Code	Description	Voltage	IP	Range	Kit	Weight
◆	GDARTINSN0B00	Pair of recessed wall photocells, adapter bowl included	12V / 24V	IP 54	15m	1 Kit	0,20 kg
◆	G1DARTISN0B00A	Pair of recessed wall photocells, adapter bowl included One Technology	24V	IP 54	15m	1 Kit	0,20 kg

Icon	Code	Description	Quantity	Weight
◆	GBOXUNSTD0B00	Adapter bowl DART INSERT / DART INSERT BUS	20	0,025 kg

Slotted pre-holes allow adjustment of the position even after installation

A pre-assembled gasket protects the electronics from any entry of insects or water. This gasket also separates the card from the 4 fixing screws and the cable passage.

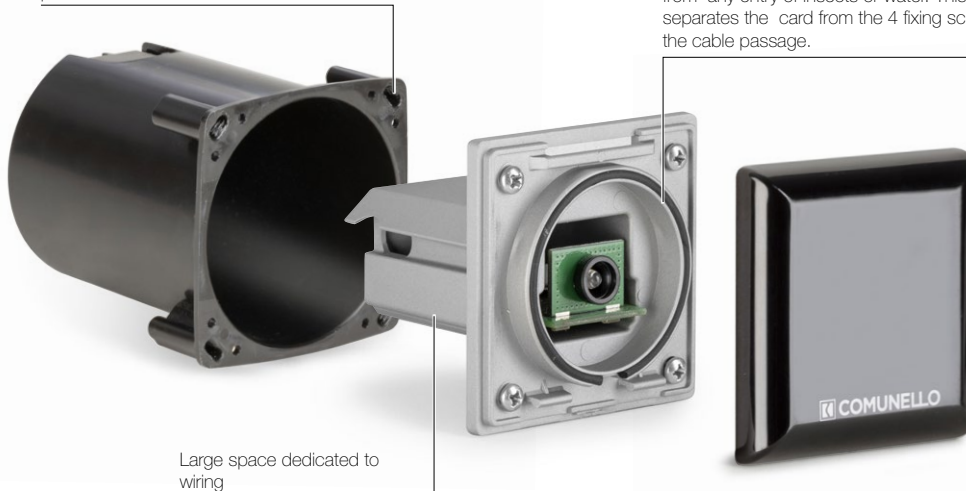

Large space dedicated to wiring