HF-KS1-WF
Wireless Gateway & Smoke Alarm Kit




- HF-LINK Interconnection.
- 433 smoke alarm kit contains HF-PG1-WF/R 1pcs and HF-S3E-R 3pcs .
- 868 smoke alarm kit contains HF-PG1-WF/R8 1pcs and HF-S3E-R8 3pcs .

▪ Specification

General	
Using Environment	-10 °C to 55 °C (14 °F to 131 °F)； ≤95% relative humidity (RH)
Communication Mode	HF-KS1-WF:Wi-Fi HF-KS1-WF/R(O-STD):433,Wi-Fi HF-KS1-WF/R8(O-STD):Wi-Fi,868
Mounting Scenario	Indoor
Weight	643.5 g
Dimension (L × W × H)	L 265 mm * W 170 mm * H 120 mm (for package)
Complete Set	HF-KS1-WF/R(O-STD):HF-PG1-WF/R *1 HF-S3E-R *3 HF-KS1-WF/R8(O-STD):HF-PG1-WF/R8 *1 HF-S3E-R8 *3

▪ Dimension

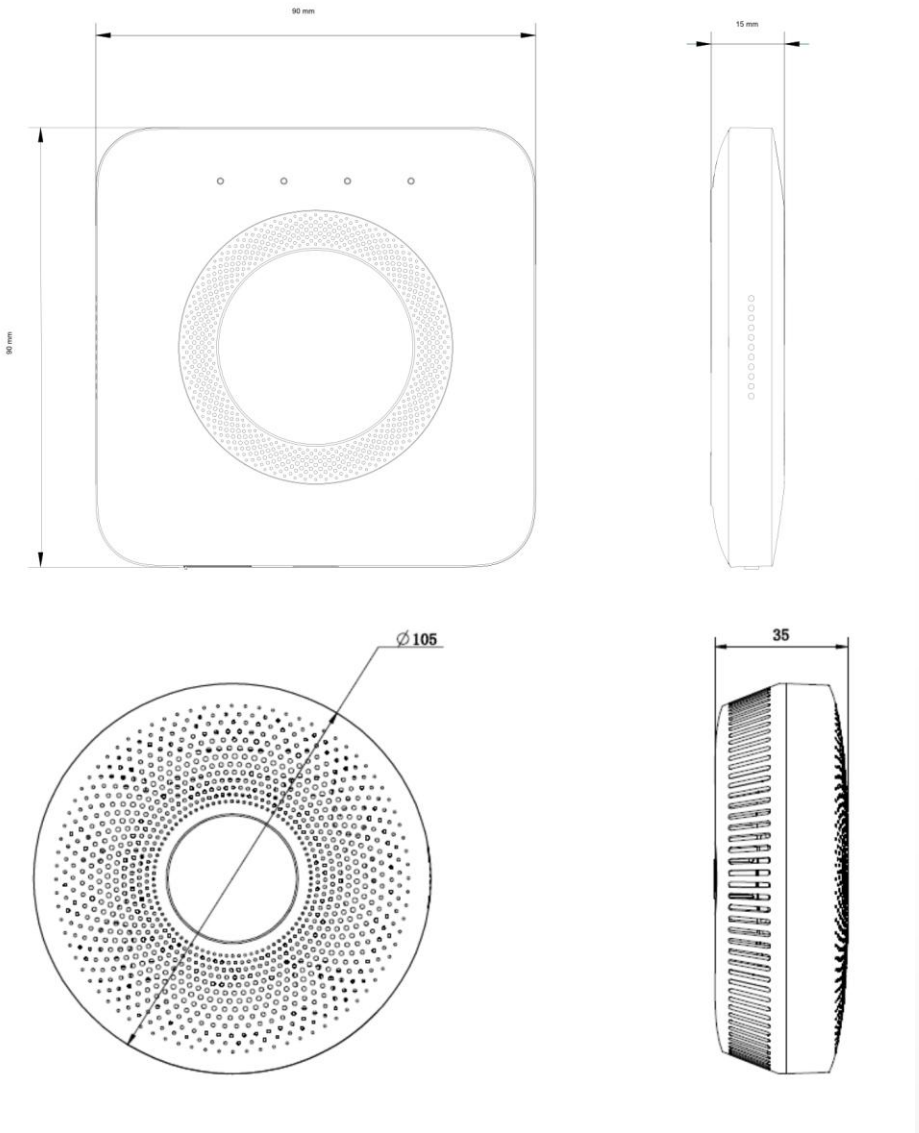

See Far, Go Further

www.hikvision.com
support@hikvision.com

© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

HIKVISION®