

# MV-CH500-90TM/TC

50 MP CMOS 10 GigE Area Scan Camera



**GEN<i>i>CAM**

**10GiGE**  
VISION

## Introduction

MV-CH500-90TM/TC camera adopts Gpixel® GMAX sensor to provide high-quality images with high resolution and low noise. It uses 10 GigE interface to transmit non-compressed data in real time, and its max. frame rate can reach 15.5 fps in full resolution.

## Key Feature

- Resolution of 7008 × 7000, pixel size of 3.2 μm × 3.2 μm.
- Supports auto or manual adjustment of gain, exposure time, and manual adjustment of Gamma correction, LUT, etc.
- Adopts 10 GigE interface, compatible with GigE, and max. transmission distance of 100 meters.
- Compact design with mounting holes on panels for flexible mounting.
- Compatible with GigE Vision V2.0 Protocol, GenlCam Standard, and third-party software based on the protocol and standard.


## Available Model

- M58-mount with fan, mono: MV-CH500-90TM-M58S-NF
- M58-mount with fan, color: MV-CH500-90TC-M58S-NF
- F-mount with fan, mono: MV-CH500-90TM-F-NF

## Applicable Industry

PCB AOI, FPD detection, photovoltaics, railway related application, etc.

## Sensor Quantum Efficiency

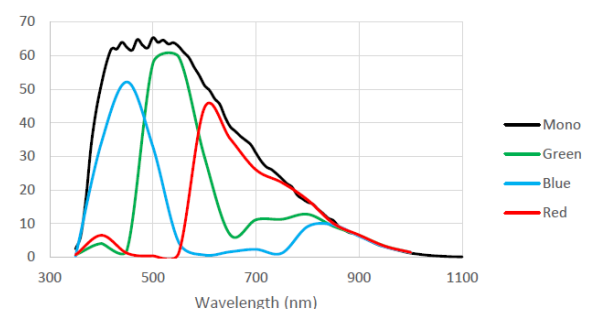


## Specification

Model	MV-CH500-90TM	MV-CH500-90TC
<b>Performance</b>		
Sensor type	CMOS, global shutter	
Sensor model	Gpixel® GMAX	
Pixel size	3.2 μm × 3.2 μm	
Sensor size	22.4 mm × 22.4 mm	
Resolution	7008 × 7000	
Max. frame rate	15.5 fps @7008 × 7000 Mono 8	15.5 fps @7008 × 7000 Bayer BG 8
Dynamic range	66 dB	
SNR	40 dB	
Gain	1.25 × to 6 ×	
Exposure time	15 μs to 10 sec	
Exposure mode	Off/Once/Continuous exposure mode	
Mono/Color	Mono	Color
Pixel format	Mono 8/10/10Packed/12/12Packed	Mono 8/10/12, Bayer BG 8/10/10Packed/12/12Packed, YUV422Packed, YUV422_YUYV_Packed, RGB 8, BGR 8
Binning	Supports 1 × 1, 1 × 2, 1 × 4, 2 × 1, 2 × 2, 2 × 4, 4 × 1, 4 × 2, 4 × 4	
Decimation	Supports 1 × 1, 1 × 2, 1 × 4, 2 × 1, 2 × 2, 2 × 4, 4 × 1, 4 × 2, 4 × 4	
Reverse image	Supports horizontal and vertical reverse image output	
<b>Electrical feature</b>		
Data interface	10 Gigabit Ethernet, compatible with Gigabit Ethernet	
Digital I/O	12-pin P10 connector provides power and I/O, including opto-isolated input × 1 (Line 0), opto-isolated output × 1 (Line 1), bi-directional non-isolated I/O × 1 (Line 2), RS-232 × 1	
Power supply	9 VDC to 24 VDC	
Power consumption	Typ. 11 W@12 VDC	Typ. 12 W@12 VDC
<b>Mechanical</b>		
Lens mount	M58-mount: Flange back focal length 11.48 mm (0.5") F-mount: Flange back focal length 46.5 mm (1.8")	
Dimension	M58-mount with fan: 74 mm × 74 mm × 78.8 mm (2.9" × 2.9" × 3.1") F-mount with fan: 74 mm × 74 mm × 84.8 mm (2.9" × 2.9" × 3.3")	
Weight	M58-mount with fan: Approx. 550 g (1.2 lb.) F-mount with fan: Approx. 600 g (1.3 lb.)	
Ingress protection	IP40 (under proper lens installation and wiring)	
Temperature	Working temperature: 0 °C to 50 °C (32 °F to 122 °F) Storage temperature: -30 °C to 70 °C (-22 °F to 158 °F)	
Humidity	20% to 95% RH, non-condensing	
<b>General</b>		
Client software	MVS or third-party software meeting with GigE Vision Protocol	
Operating system	32/64-bit Windows XP/7/10, 64-bit Windows 11	
Compatibility	GigE Vision V2.0, GenICam	
Certification	CE, RoHS, KC	

## Dimension

**HIKROBOT**

M58-mount with fan:

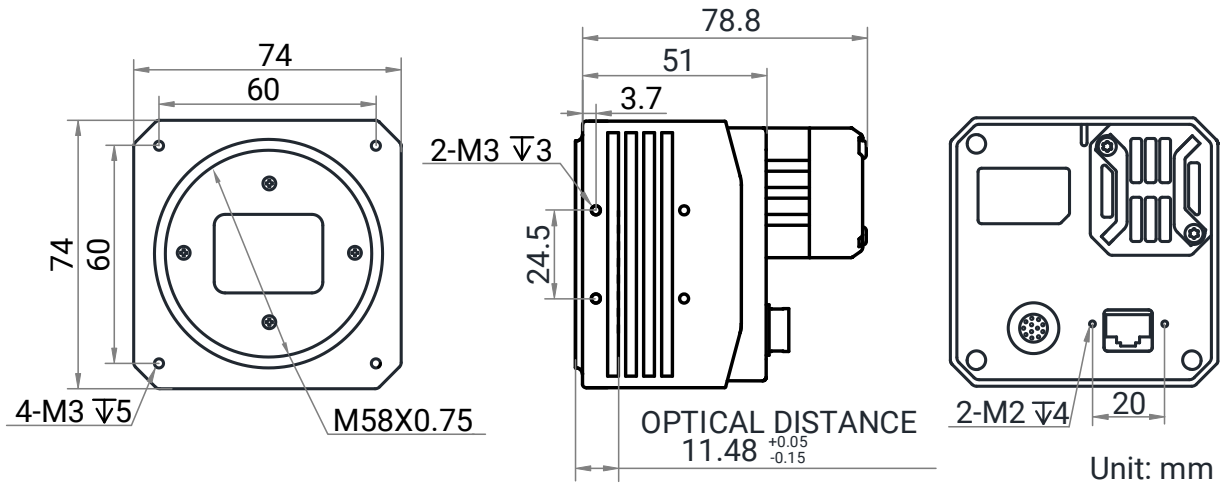

F-mount with fan:

