

ÖFK-200 & ÖFK-200-N

Hold up device

VANDERBILT



Key Features include:

- Optional indication of operation
- Latching or momentary versions
- Single push buttons
- Gold plated contacts for long term, reliable operation
- Tamper for cover removal
- Simple reset for latched version- no keys required
- Robust construction
- Flexible configuration options
- Silent electronic relays
- LED indication of operation

ÖFK-200 & ÖFK-200-N

Hold up device

VANDERBILT

Description

The ÖFK-200 Series Personal attack buttons are mechanical buttons aimed for banks, gas stations, warehouses, governmental institutions or other places where you can expect a threat.

The contact function is gold-plated, not oxidizing, giving a long lasting working performance.

It is reliable in function and not sensitive to bumps that can trigger a false alarm.


It is well adapted to modern alarm systems with a low loop current.

The push buttons are equipped with screw terminals with wire guard and extra free terminals.


The ÖFK-200 is a latching push-button alarm switch with normally closed contacts. Operation of the button will release the alarm contacts and the reset is performed, when the button is depressed.

This switch includes a red LED alarm indicator connected in series with a 470 Ohm resistor.

The ÖFK-200-N is a momentary push-button alarm switch with normally closed contacts. Operation of the button will release the alarm contacts and the reset is performed, when the button is released.

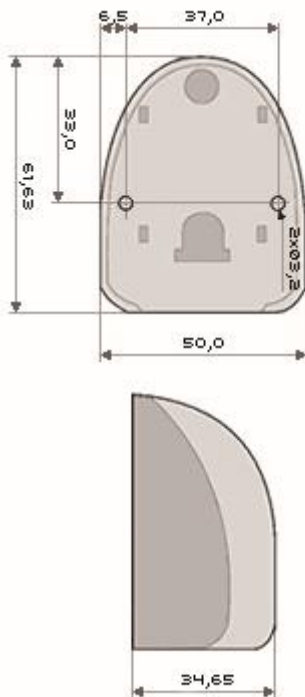

Only the ÖFK-200 has connection terminals (1 = - & 2 = +) for the remote confirmation LED indication.

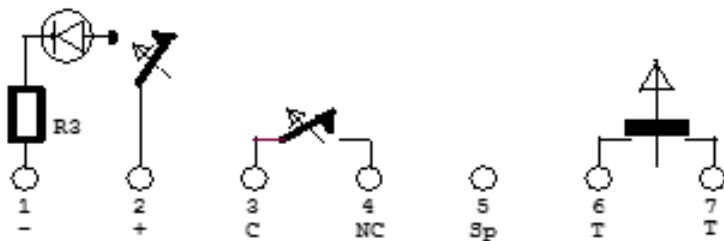

VANDERBILT

ÖFK-200 & ÖFK-200-N

Hold up device

VANDERBILT

■ Technical Specifications

Supply voltage for LED	9...15V DC
Tamper contact	1 x N/C
Alarm Contacts	
- ÖFK-200	1 x changeover contact
- ÖFK-200-N	1 x changeover contact
Housing	
- Colour	White
- Material	ABS
Switching voltage	
- Alarm contacts	30V DC/100mA
- Tamper contacts	35V DC/50mA
Operational life	>10,000 switches at 40mA
Cable connection	Screw terminals
Alarm confirmation indication	Red LED, ÖFK-200
Environmental	
- Operating temperature	-10 ... +55 °C
- Housing protection	IP31
- Humidity	85%
Dimensions (Lx W x H)	60 x 50 x 35mm

■ Ordering information

Type	Art.-No.	Description	Weight
ÖFK-200	N54543-Z125-A100	Hold up button, latching with LED indicator	0.037 Kg
ÖFK-200-N	N54543-Z126-A100	Hold up button, momentary	0.037 Kg

Issued by
Vanderbilt
Clonshaugh Business and
Technology Park
Clonshaugh
Dublin 17
Ireland
www.vanderbiltindustries.com

Data and design subject to change without notice.
Supply subject to availability.

VANDERBILT